PROJECT PLANNING & CONTROL REPORT

Construction of a Single-Storey Residential Building

Schedule, Budget, Critical Path and Resource Plan

Baseline prepared in Microsoft Project

997,984,000 Toman
Total project budget

125.3 working days
01 Feb 2026 – 22 Jul 2026

Prepared by	**Maral Esmikhani**
Source file	Microsoft Project plan (`.mpp`), 177 task rows, 12 resources
Status date	1 March 2026
Currency	Iranian Toman; “M” denotes million Toman

Contents

1 Executive Summary 1

2 Project Overview and Work Breakdown Structure 2

3 Schedule 3

3.1 Planning assumptions . . . 3

3.2 Gantt chart . . . 4

3.3 Work packages . . . 4

3.4 Key milestones . . . 5

4 Critical Path 5

5 Cost Plan 6

6 Resource Plan 7

7 Progress at the Status Date 9

8 Assumptions and Notes 9

A Detailed Gantt Chart 10

B Complete Task List 11

1 Executive Summary

This report documents the baseline plan for the construction of a single-storey residential building. The plan was developed in Microsoft Project and is organised into four phases that run from project initiation through final handover. The report presents the work breakdown structure, the schedule and its critical path, the cost plan and cash flow, and the resource plan.

997,984,000 Budget (Toman)	**125.3 days** Duration (working days)	**01 Feb 2026** Planned start	**22 Jul 2026** Planned finish
135 Activities (4 milestones)	**5,040.8 h** Total planned work	**16 packages** On the critical path	**22 laborers** Peak daily headcount

Key findings

- **Budget distribution. Structure & Rough Construction** is the largest phase at 337.1 M Toman (33.8%), followed by **MEP & Finishing Works** at 293.7 M (29.4%), **Site Preparation & Mobilization** at 275.2 M (27.6%) and **Project Management & Planning** at 92.1 M (9.2%).

- **Cost structure.** Human labor accounts for 90.6% of the budget, and laborers alone for 66.1% (660.1 M). Materials represent 7.6% and machinery 1.8%.
- **Cash flow.** Half of the budget is expected to be spent by 28 Apr 2026 and three quarters by 17 Jun 2026. April is the peak month with 251.2 M Toman of planned spending.
- **Critical path.** The critical path runs through 16 work packages (72 activities, about 55% of all non-milestone activities), from scope definition to project closure. Any delay on these activities delays the project finish on 22 Jul 2026.
- **Progress at the status date (1 March 2026).** The project is 62% complete in Phase 1 and 11% complete overall; actual cost to date is 60.0 M Toman (6.0% of budget) and cost variance is zero.

2 Project Overview and Work Breakdown Structure

The project covers the full life cycle of a single-storey residential building: management and planning, site preparation and mobilization, structural and shell works, mechanical and electrical installations, finishing, and handover. The plan contains 135 detailed activities grouped under 41 summary tasks, in four levels of work breakdown. Figure 1 shows the first two levels of the breakdown with the budget attached to each element.

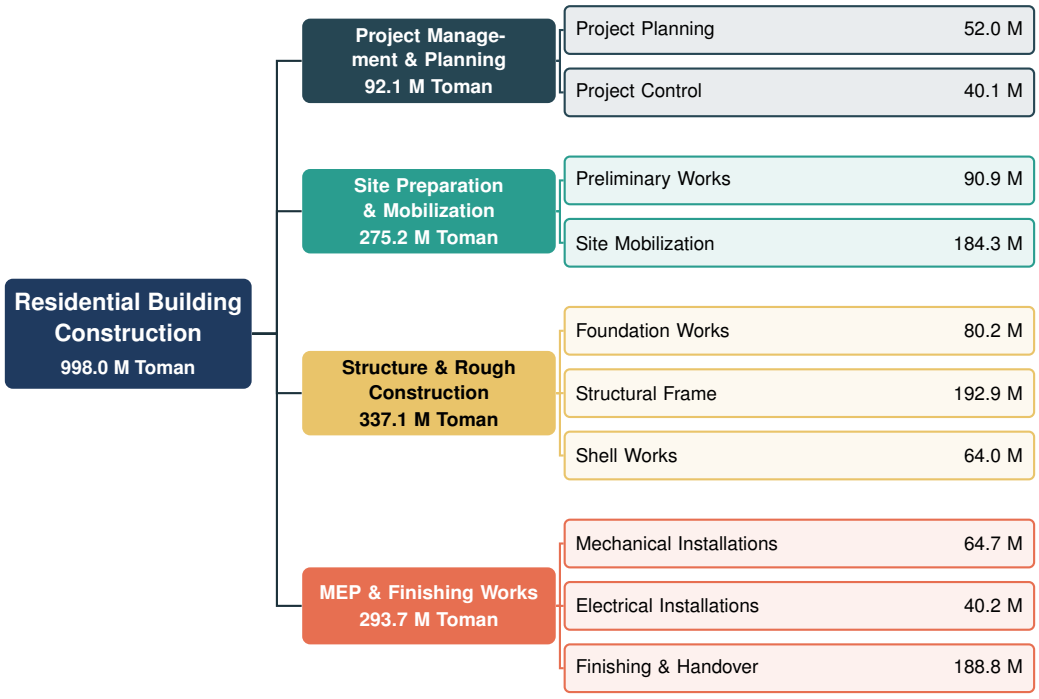


Figure 1. Work breakdown structure (phases and work packages) with planned budget in million Toman.

Table 1. Project phases: schedule and budget.

Phase	Start	Finish	Work days	Cost (M)	Share
Project Management & Planning	01 Feb 2026	15 Mar 2026	32.2	92.1	9.2%
Site Preparation & Mobilization	04 Mar 2026	19 Apr 2026	30.0	275.2	27.6%
Structure & Rough Construction	04 Apr 2026	28 Jun 2026	64.3	337.1	33.8%
MEP & Finishing Works	09 Jun 2026	22 Jul 2026	32.5	293.7	29.4%
Total project	**01 Feb 2026**	**22 Jul 2026**	**125.3**	**998.0**	**100.0%**

Phases overlap because the plan starts successor work as soon as its predecessors allow: site preparation begins while planning activities are still running, and installations start before masonry is complete. For this reason the phase durations add up to more than the project duration.

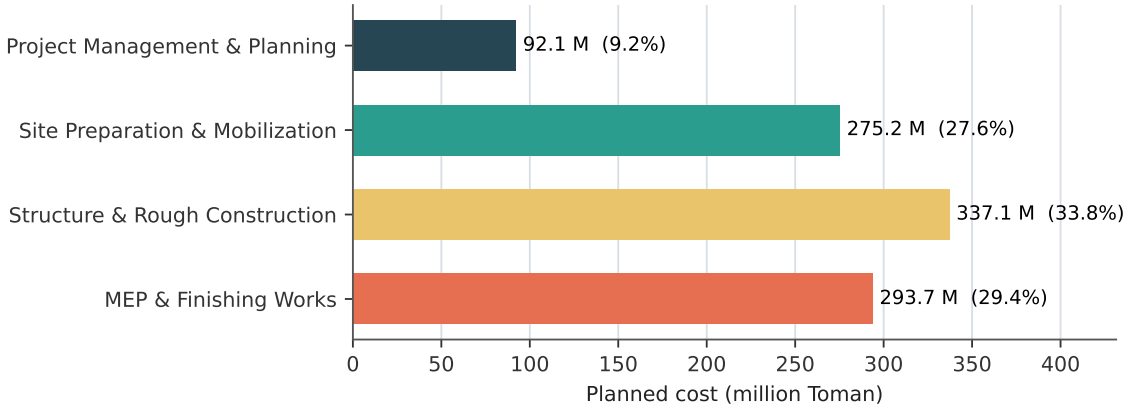


Figure 2. Planned cost by phase.

3 Schedule

3.1 Planning assumptions

The schedule uses a project calendar with a Saturday–Wednesday working week and 8-hour working days (Thursday and Friday are non-working). The Nowruz holiday, 21–24 March 2026, is excluded. All durations in this report are in working days. The project spans 172 calendar days, or 125.3 working days, from 01 Feb 2026 to 22 Jul 2026.

3.2 Gantt chart

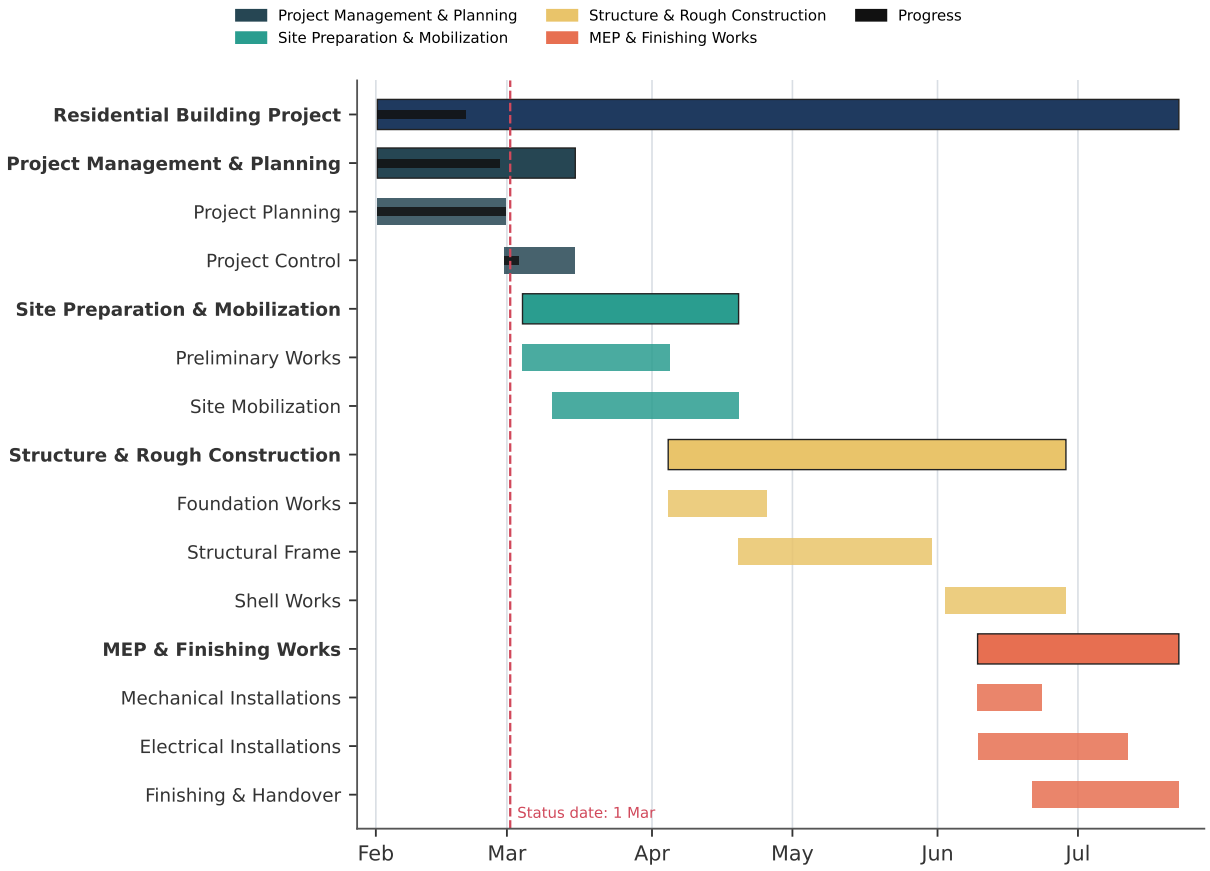


Figure 3. Project Gantt chart at phase and work-package level. The dark inner bar shows completed work at the status date; the dashed line marks the status date. A task-level Gantt chart is given in Appendix A.

3.3 Work packages

Table 2. Work packages: schedule and budget.

Work package	Start	Finish	Work days	Cost (M)	Share
Project Planning	01 Feb 2026	28 Feb 2026	21.0	52.0	5.2%
Project Control	28 Feb 2026	15 Mar 2026	12.2	40.1	4.0%
Preliminary Works	04 Mar 2026	04 Apr 2026	19.0	90.9	9.1%
Site Mobilization	10 Mar 2026	19 Apr 2026	25.0	184.3	18.5%
Foundation Works	04 Apr 2026	25 Apr 2026	16.0	80.2	8.0%
Structural Frame	19 Apr 2026	30 May 2026	30.8	192.9	19.3%
Shell Works	02 Jun 2026	28 Jun 2026	18.5	64.0	6.4%
Mechanical Installations	09 Jun 2026	23 Jun 2026	10.0	64.7	6.5%
Electrical Installations	09 Jun 2026	11 Jul 2026	23.0	40.2	4.0%
Finishing & Handover	21 Jun 2026	22 Jul 2026	24.5	188.8	18.9%

3.4 Key milestones

Table 3. Key milestones and approvals.

Milestone	Work package	Date
Project Start	Project Scope Definition	01 Feb 2026
Budget Approved	Project Cost Estimating	28 Feb 2026
Site Handover Approved	Site Handover & Inspection	10 Mar 2026
Layout Approved	Building Layout (Setting Out)	04 Apr 2026
Foundation Complete	Reinforced Concrete Foundation	25 Apr 2026
Roof Slab Curing Complete	Roof Slab	30 May 2026
Plaster Approved	Base Plaster	28 Jun 2026
Provisional Handover	Project Handover	19 Jul 2026
Final Handover	Project Handover	20 Jul 2026
Project Finish	Project Handover	22 Jul 2026

4 Critical Path

An activity is critical when its total float is zero. In this plan, 72 activities (about 55% of the non-milestone activities) are critical. Grouped by work package they form a single chain of 16 packages from project initiation to closure, shown in Figure 4. The chain is shown in execution order, left to right in the first row, right to left in the second, and so on.

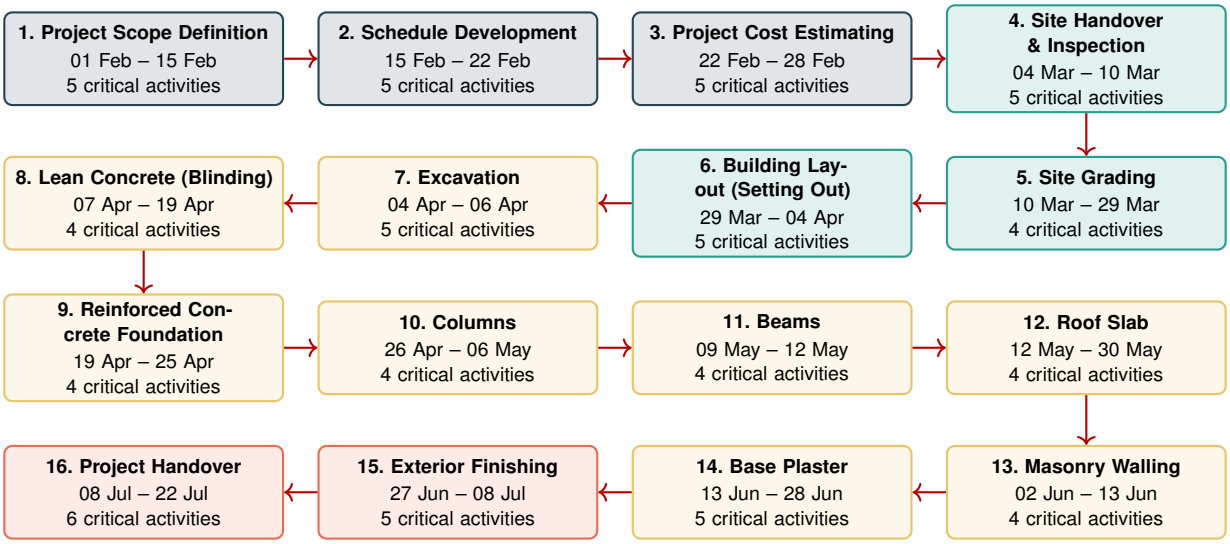


Figure 4. Critical path by work package (colors indicate phase).

Several critical links contain a mandatory waiting period (lag) that cannot be compressed by adding resources:

- Project Cost Estimating: Budget Approval → Site Handover & Inspection: Site Visit: 3 working days
- Lean Concrete (Blinding): Level Surface → Lean Concrete (Blinding): Curing: 5 working days
- Reinforced Concrete Foundation: Curing → Columns: Install Columns: 1 working day
- Roof Slab: Curing → Masonry Walling: Prepare Materials: 3 working days
- Exterior Finishing: Exterior Painting → Exterior Finishing: Final Inspection: 2 working days

Activities outside this chain have positive float. The project control and reporting packages run in parallel to execution and are not on the critical path. Among non-critical packages, water piping, sewage piping and interior finishing have the least float (5.5 working days), followed by conduit installation (8.5) and wiring (9.5). These are the packages most likely to become critical if they slip.

5 Cost Plan

The total budget at completion is 997,984,000 Toman. Cost was assigned through resources: each resource assignment is priced at the resource's standard rate (labor and machinery per hour, materials per unit). The cumulative cost curve and monthly cash-flow requirement below were obtained by distributing each assignment's cost evenly over the working days of its activity.

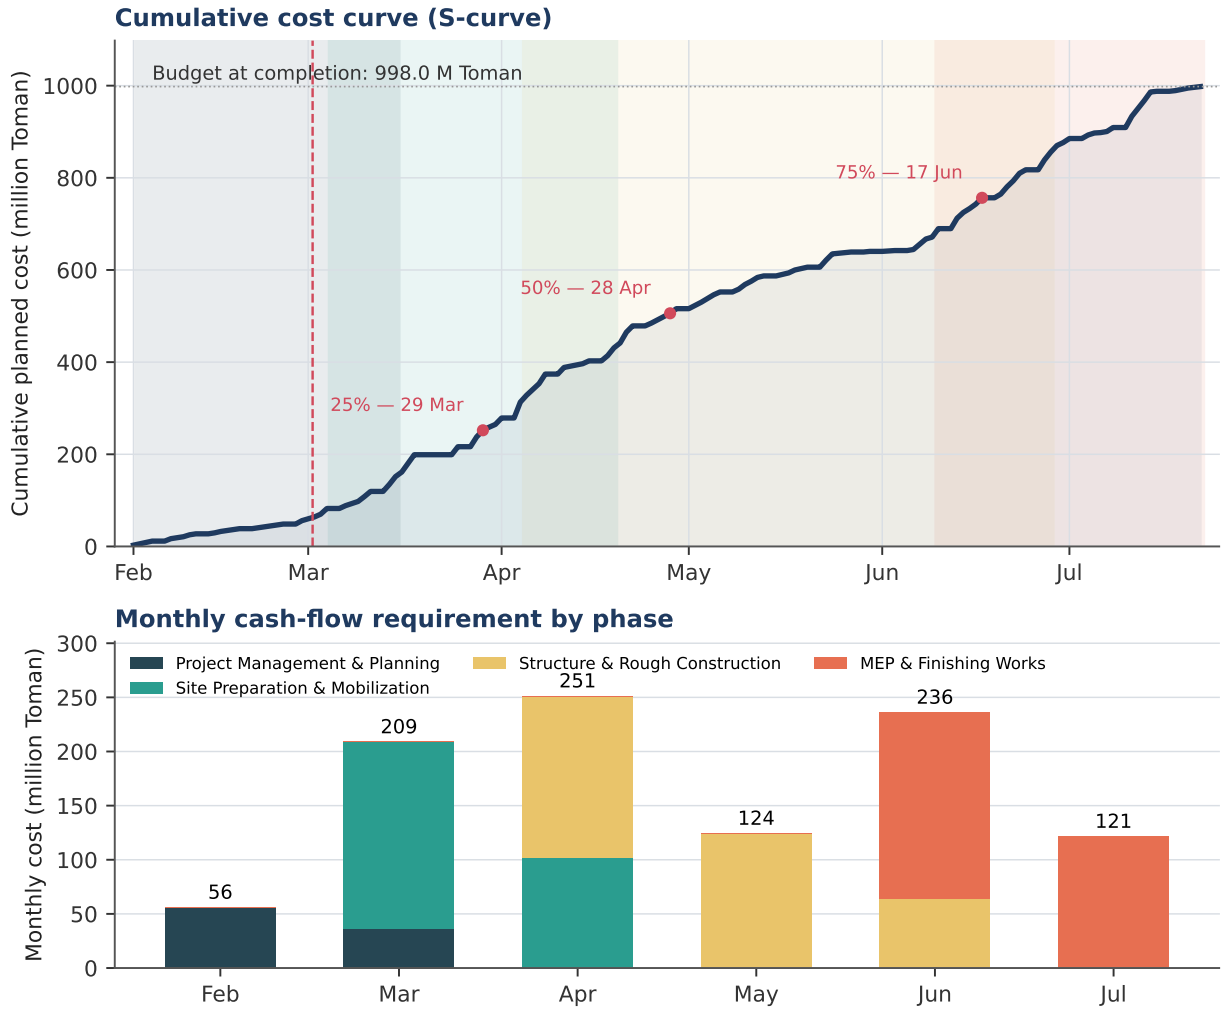


Figure 5. Cumulative planned cost (S-curve) and monthly cash-flow requirement by phase. Red dots mark 25%, 50% and 75% of the budget; the dashed red line is the status date.

The curve reaches 25% of the budget on 29 Mar 2026, 50% on 28 Apr 2026 and 75% on 17 Jun 2026. Spending is front-loaded by the site and foundation works in March–April, drops in May while the roof cures, and rises again in June with masonry, plastering and installations.

Table 4. Largest work packages by cost.

Work package	Phase	Work days	Cost (M)	Share
Project Handover	Finishing & Handover	11.0	95.2	9.5%
Beams	Structural Frame	15.8	78.7	7.9%
Temporary Utilities	Site Mobilization	18.7	76.4	7.7%
Site Grading	Preliminary Works	9.0	60.4	6.1%
Roof Slab	Structural Frame	13.0	59.8	6.0%
Site Facilities	Site Mobilization	11.0	56.8	5.7%

6 Resource Plan

The plan uses seven work resources (people and machinery) and five material resources. Table 5 lists rates, availability, planned quantities and cost.

Table 5. Resource summary. Rates in Toman; “Max units” is the number of units available simultaneously.

Resource	Type	Rate	Max units	Planned qty	Cost (M)	Share
Laborer	Work	170,000 /h	25	3,883.2 h	660.1	66.1%
Engineer	Work	250,000 /h	5	504.0 h	126.0	12.6%
Foreman	Work	250,000 /h	3	204.0 h	51.0	5.1%
Project Manager	Work	300,000 /h	1	105.6 h	31.7	3.2%
Electrician	Work	110,000 /h	2	176.0 h	19.4	1.9%
Machinery	Work	200,000 /h	15	88.0 h	17.6	1.8%
Plumber (MEP)	Work	200,000 /h	2	80.0 h	16.0	1.6%
Pipe	Material	172,000 /m	–	250 m	43.0	4.3%
Rebar	Material	30,000 /kg	–	500 kg	15.0	1.5%
Cement	Material	120,000 /bag	–	60 bag	7.2	0.7%
Brick	Material	3,000 /pcs	–	2,000 pcs	6.0	0.6%
Concrete	Material	2,000,000 /m³	–	2.5 m³	5.0	0.5%
Total				**5,040.8 h**	**998.0**	**100.0%**

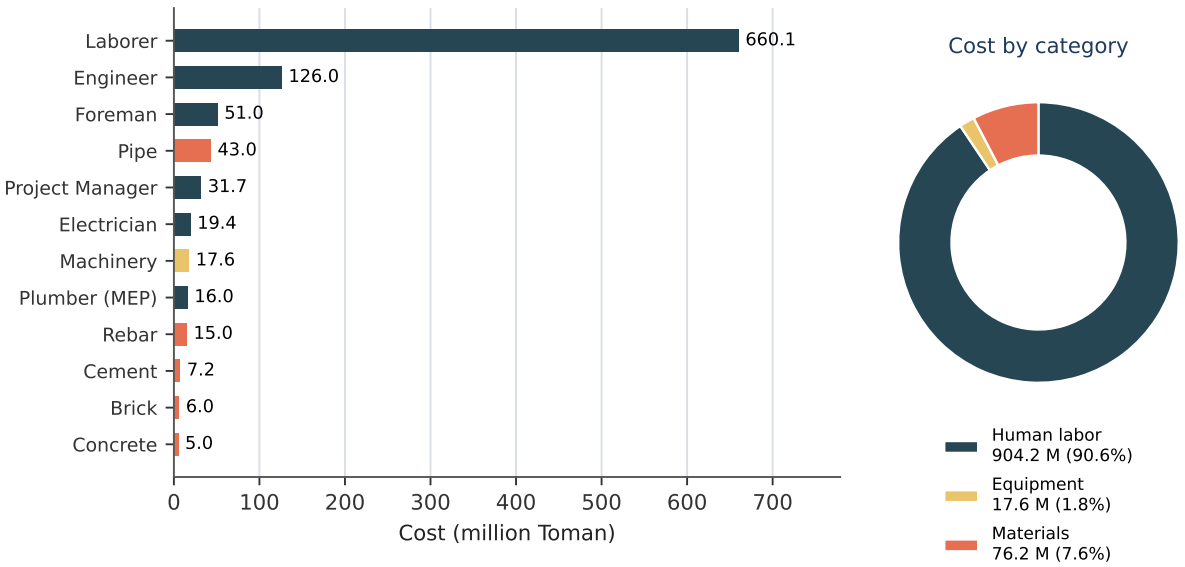


Figure 6. Cost by resource and by category.

Laborers are by far the dominant resource: 660.1 M Toman, or 66.1% of the budget. Figure 7 shows how the workload is distributed over time. The daily laborer headcount peaks at 22 on 21 Apr 2026, within the availability limit of 25.

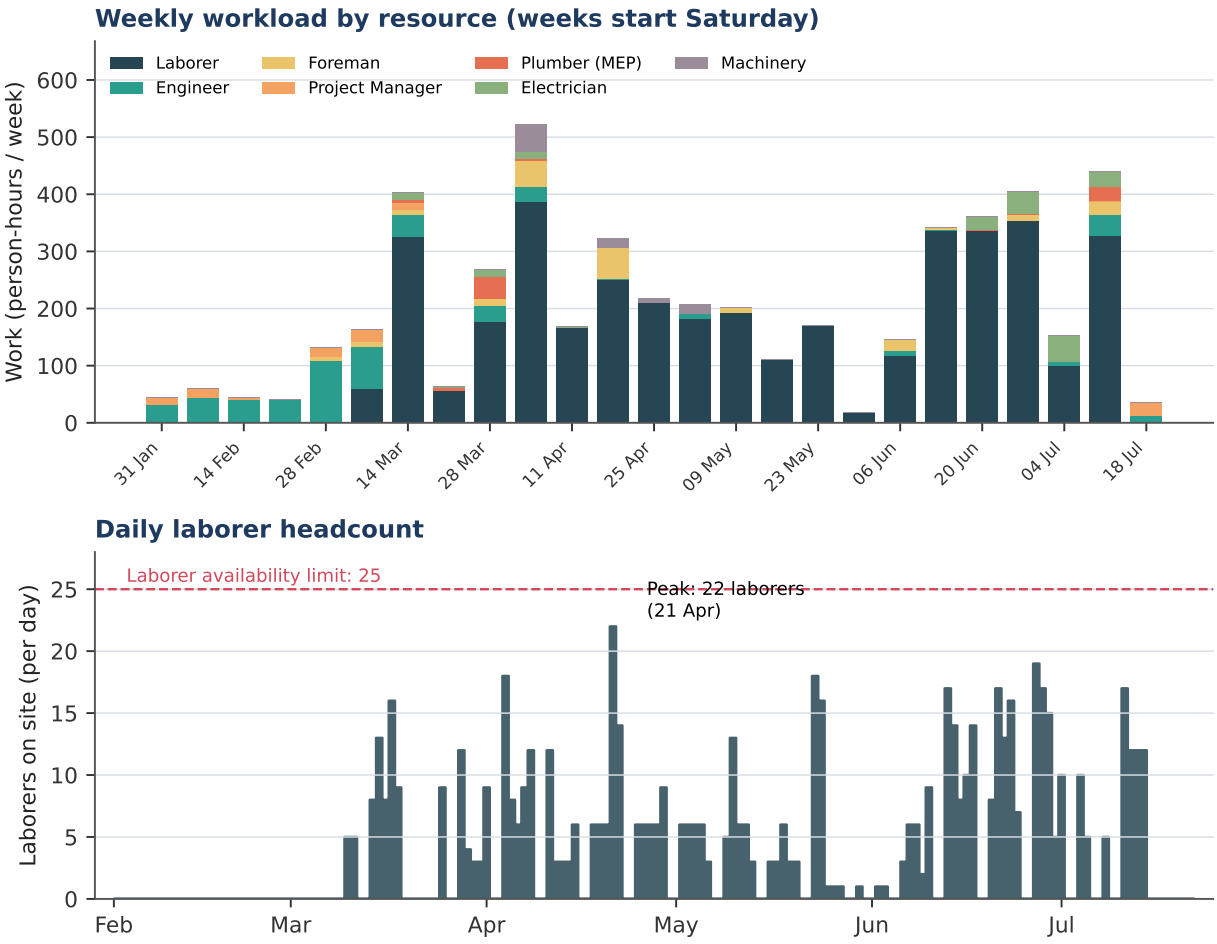


Figure 7. Weekly workload by resource and daily laborer headcount.

7 Progress at the Status Date

The status date is 1 March 2026. Only Phase 1 (Project Management & Planning) has started.

Table 6. Progress snapshot.

Indicator	Value
Overall project completion (duration-based)	11%
Overall work completion	5%
Phase 1 – Project Management & Planning	62%
Project Planning	100%
Scope Definition	100%
Schedule Development	100%
Project Cost Estimating	100%
Project Control	21%
Actual cost to date	60.0 M Toman (6.0% of budget)
Remaining cost	938.0 M Toman
Cost variance	0

8 Assumptions and Notes

- All data come from the Microsoft Project file: task names, durations, predecessor links, resource assignments, rates and the project calendar. Task and resource names were translated into English for this report.
- Critical activities are those with zero total float as calculated by Microsoft Project.
- The S-curve, monthly cash flow, weekly workload and daily headcount are derived by spreading each assignment evenly over the working days of its activity; they are planning approximations, not time-phased values exported from Microsoft Project.
- Costs are in Iranian Toman. “M” means million Toman.

A Detailed Gantt Chart

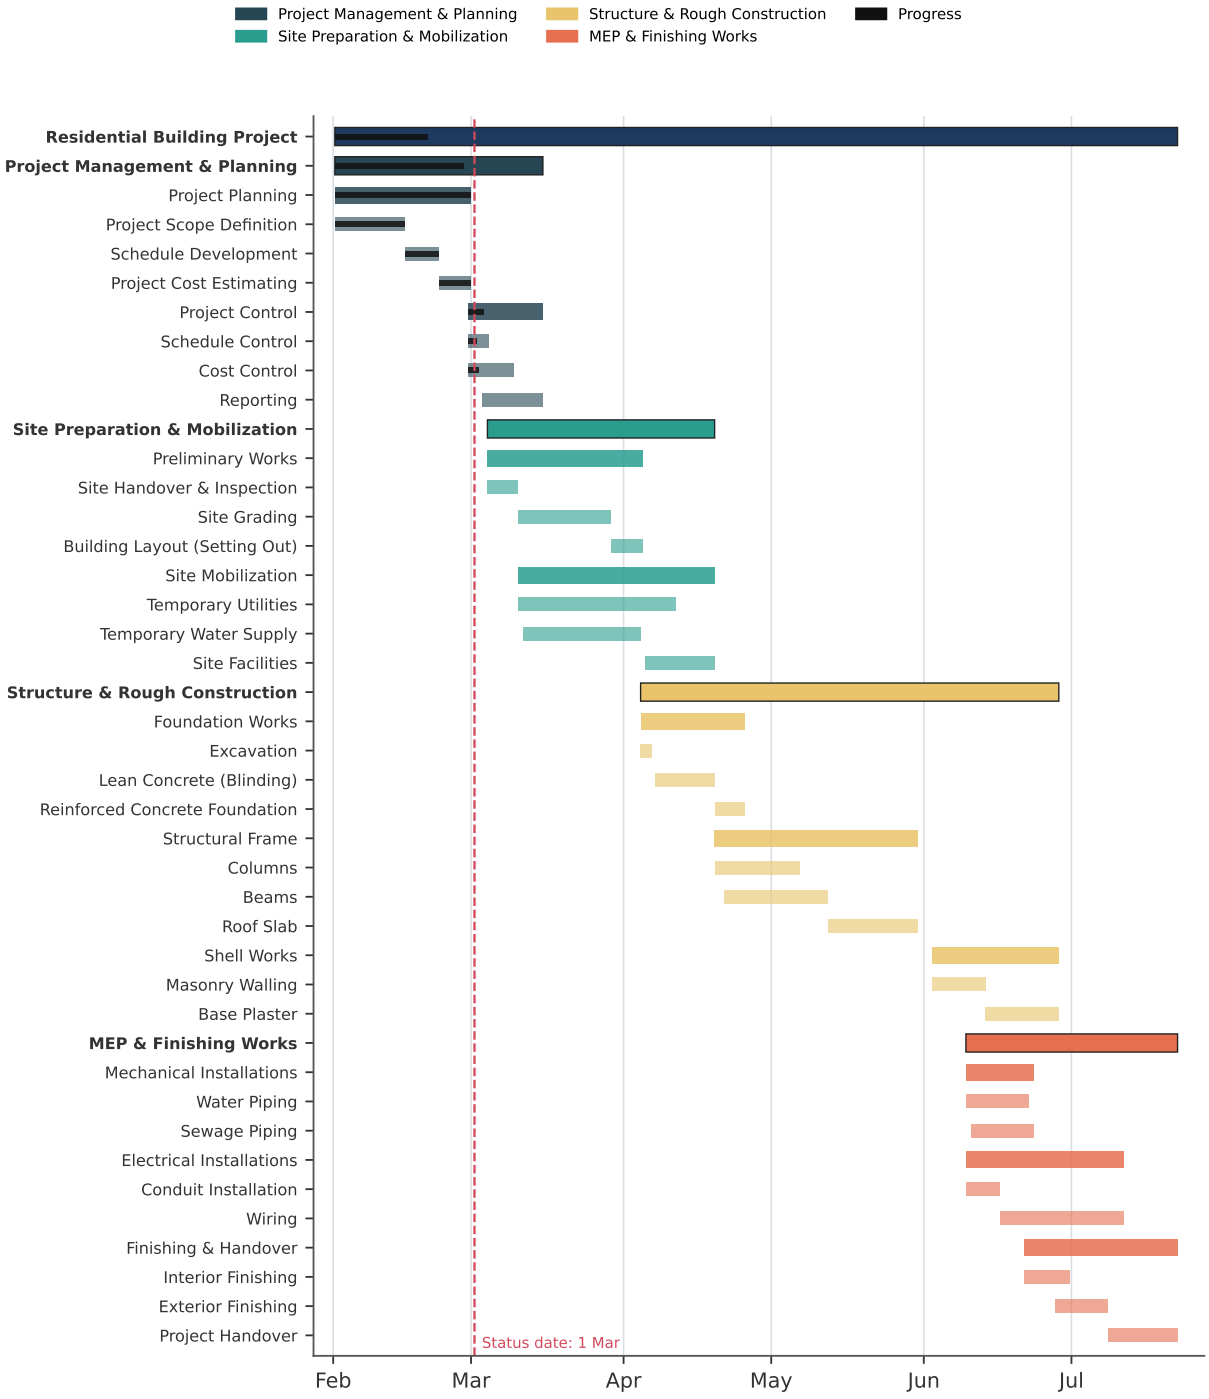


Figure 8. Gantt chart down to the third level of the work breakdown structure.

B Complete Task List

ID	Task	Days	Start	Finish	Cost (M)	CP
0	**Residential Building (Single-Storey Villa) Construction Project**	125.3	01 Feb	22 Jul	997.98	
1	**Project Management & Planning**	32.2	01 Feb	15 Mar	92.08	
2	**Project Planning**	21.0	01 Feb	28 Feb	52.00	
3	**Project Scope Definition**	11.0	01 Feb	15 Feb	31.60	
4	Project Start	0.0	01 Feb	01 Feb	0.00	•
5	Identify Client Requirements	3.0	01 Feb	03 Feb	8.40	•
6	Review Intended Use	2.0	04 Feb	07 Feb	6.40	•
7	Review Site Constraints	3.0	07 Feb	10 Feb	8.40	•
8	Finalize Scope	3.0	10 Feb	15 Feb	8.40	•
9	**Schedule Development**	5.0	15 Feb	22 Feb	10.00	
10	Identify Activities	1.0	15 Feb	16 Feb	2.00	•
11	Sequence Activities	1.0	16 Feb	17 Feb	2.00	•
12	Estimate Activity Durations	1.0	17 Feb	18 Feb	2.00	•
13	Define Precedence Relationships	1.0	18 Feb	21 Feb	2.00	•
14	Review Schedule	1.0	21 Feb	22 Feb	2.00	•
15	**Project Cost Estimating**	5.0	22 Feb	28 Feb	10.40	
16	Identify Cost Items	1.0	22 Feb	23 Feb	2.00	•
17	Estimate Material Cost	1.0	23 Feb	24 Feb	2.00	•
18	Estimate Labor Cost	1.0	24 Feb	25 Feb	2.00	•
19	Aggregate Costs	1.0	25 Feb	28 Feb	2.00	•
20	Budget Approval	1.0	28 Feb	28 Feb	2.40	•
21	**Project Control**	12.2	28 Feb	15 Mar	40.08	
22	**Schedule Control**	5.0	28 Feb	04 Mar	10.00	
23	Set Status Date	1.0	28 Feb	28 Feb	2.00	
24	Record Planned Progress	1.0	01 Mar	01 Mar	2.00	
25	Record Actual Progress	1.0	02 Mar	02 Mar	2.00	
26	Schedule Variance Analysis	1.0	03 Mar	03 Mar	2.00	
27	Update Schedule	1.0	04 Mar	04 Mar	2.00	
28	**Cost Control**	8.2	28 Feb	09 Mar	17.28	
29	Record Actual Cost	2.0	28 Feb	01 Mar	4.00	
30	Compare with Budget	4.0	02 Mar	07 Mar	8.00	
31	Cost Variance Analysis	1.0	07 Mar	08 Mar	2.40	
32	Forecast Final Cost	1.0	08 Mar	09 Mar	2.40	
33	Cost Report	0.2	09 Mar	09 Mar	0.48	
34	**Reporting**	9.2	03 Mar	15 Mar	12.80	
35	Prepare Progress Report	2.0	03 Mar	04 Mar	4.00	
36	Prepare Cost Report	1.0	09 Mar	10 Mar	2.00	
37	Prepare Charts	1.0	10 Mar	11 Mar	2.00	
38	Review Report	1.0	11 Mar	14 Mar	2.40	
39	Present Report	1.0	14 Mar	15 Mar	2.40	
40	**Site Preparation & Mobilization**	30.0	04 Mar	19 Apr	275.16	
41	**Preliminary Works**	19.0	04 Mar	04 Apr	90.88	
42	**Site Handover & Inspection**	5.0	04 Mar	10 Mar	14.40	
43	Site Visit	1.0	04 Mar	04 Mar	6.40	•
44	Check Site Boundaries	1.0	07 Mar	07 Mar	2.00	•
45	Check Site Access	1.0	07 Mar	08 Mar	2.00	•
46	Document Site Condition	1.0	08 Mar	09 Mar	2.00	•
47	Approve Site Handover	1.0	09 Mar	10 Mar	2.00	•
48	**Site Grading**	9.0	10 Mar	29 Mar	60.40	
49	Earthwork	3.0	10 Mar	15 Mar	24.40	•
50	Subgrade Compaction	2.0	15 Mar	17 Mar	13.60	•
51	Level Control	3.0	17 Mar	28 Mar	20.40	•
52	Grading Approval	1.0	28 Mar	29 Mar	2.00	•
53	**Building Layout (Setting Out)**	5.0	29 Mar	04 Apr	16.08	
54	Establish Building Axes	1.0	29 Mar	30 Mar	2.00	•
55	Mark Axes	1.0	30 Mar	31 Mar	2.00	•
56	Check Dimensions	1.0	31 Mar	01 Apr	2.00	•
57	Layout Correction	1.0	01 Apr	04 Apr	8.08	•
58	Layout Approval	1.0	04 Apr	04 Apr	2.00	•
59	**Site Mobilization**	25.0	10 Mar	19 Apr	184.28	
60	**Temporary Utilities**	18.7	10 Mar	11 Apr	76.40	

ID	Task	Days	Start	Finish	Cost (M)	CP
61	Request Temporary Power	2.0	10 Mar	14 Mar	4.00	
62	Temporary Cabling	3.3	14 Mar	17 Mar	14.48	
63	Install Electrical Panel	3.3	17 Mar	28 Mar	14.48	
64	Power Test	3.3	28 Mar	01 Apr	14.48	
65	Power Commissioning	6.7	01 Apr	11 Apr	28.96	
66	**Temporary Water Supply**	12.0	11 Mar	04 Apr	51.08	
67	Request Water Connection	5.0	11 Mar	18 Mar	10.00	
68	Temporary Piping	3.0	18 Mar	29 Mar	34.68	
69	Install Taps	1.0	29 Mar	30 Mar	1.60	
70	Water Test	2.0	30 Mar	01 Apr	3.20	
71	Water Commissioning	1.0	01 Apr	04 Apr	1.60	
72	**Site Facilities**	11.0	05 Apr	19 Apr	56.80	
73	Set Up Storage Area	3.3	05 Apr	08 Apr	17.60	
74	Set Up Site Office	1.7	08 Apr	11 Apr	6.80	
75	Equip Tools	3.3	11 Apr	15 Apr	13.60	
76	Site Safety Measures	1.7	15 Apr	18 Apr	6.80	
77	Mobilization Approval	1.0	18 Apr	19 Apr	12.00	
78	**Structure & Rough Construction**	64.3	04 Apr	28 Jun	337.06	
79	**Foundation Works**	16.0	04 Apr	25 Apr	80.20	
80	**Excavation**	3.0	04 Apr	06 Apr	33.84	
81	Mark Excavation Limits	1.0	05 Apr	05 Apr	2.00	•
82	Mobilize Machinery	1.0	06 Apr	06 Apr	2.00	•
83	Perform Excavation	1.0	04 Apr	04 Apr	23.52	•
84	Haul Soil	1.0	05 Apr	05 Apr	4.32	•
85	Level Control	1.0	06 Apr	06 Apr	2.00	•
86	**Lean Concrete (Blinding)**	9.0	07 Apr	19 Apr	21.12	
87	Wetting	1.0	07 Apr	07 Apr	4.08	•
88	Pour Lean Concrete	1.0	08 Apr	08 Apr	8.88	•
89	Level Surface	1.0	11 Apr	11 Apr	4.08	•
90	Curing	1.0	18 Apr	19 Apr	4.08	•
91	**Reinforced Concrete Foundation**	4.0	19 Apr	25 Apr	25.24	
92	Rebar Placement	1.0	19 Apr	20 Apr	2.00	•
93	Formwork	1.0	20 Apr	21 Apr	4.08	•
94	Concrete Pouring	1.0	21 Apr	22 Apr	7.80	•
95	Vibration	1.0	21 Apr	22 Apr	7.28	
96	Curing	1.0	22 Apr	25 Apr	4.08	•
97	Foundation Complete	0.0	25 Apr	25 Apr	0.00	
98	**Structural Frame**	30.8	19 Apr	30 May	192.90	
99	**Columns**	14.0	19 Apr	06 May	54.44	
100	Cut Sections	2.0	19 Apr	21 Apr	23.16	
101	Install Columns	3.0	26 Apr	29 Apr	12.24	•
102	Align Columns	3.0	29 Apr	03 May	8.88	•
103	Welding	2.0	04 May	05 May	8.16	•
104	Quality Control	1.0	06 May	06 May	2.00	•
105	**Beams**	15.8	21 Apr	12 May	78.70	
106	Cut Beams	0.3	21 Apr	21 Apr	2.04	
107	Install Beams	1.5	09 May	10 May	4.08	•
108	Connect Beams	0.3	10 May	10 May	2.04	•
109	Level Control	1.0	10 May	11 May	4.08	•
110	Inspection	1.0	11 May	12 May	2.00	•
111	**Roof Slab**	13.0	12 May	30 May	59.76	
112	Roof Formwork	4.0	12 May	18 May	16.32	•
113	Roof Rebar	3.0	18 May	23 May	12.24	•
114	Roof Concrete Pouring	1.0	23 May	24 May	20.32	•
115	Vibration	1.0	23 May	24 May	4.08	
116	Curing	5.0	24 May	30 May	6.80	•
117	**Shell Works**	18.5	02 Jun	28 Jun	63.96	
118	**Masonry Walling**	7.0	02 Jun	13 Jun	33.04	
119	Prepare Materials	2.0	02 Jun	06 Jun	2.72	•
120	Prepare Mortar	1.0	06 Jun	07 Jun	2.72	•
121	Lay Walls	1.0	07 Jun	08 Jun	14.72	•
122	Plumb Check	1.0	07 Jun	08 Jun	4.72	
123	Install Wall Posts	3.0	08 Jun	13 Jun	8.16	•
124	**Base Plaster**	11.5	13 Jun	28 Jun	30.92	
125	Surface Preparation	1.0	13 Jun	14 Jun	2.72	•

ID	Task	Days	Start	Finish	Cost (M)	CP
126	Apply Plaster	7.0	14 Jun	23 Jun	19.04	•
127	Surface Finishing	2.0	23 Jun	27 Jun	5.44	•
128	Quality Control	0.5	27 Jun	27 Jun	1.00	•
129	Plaster Approval	1.0	27 Jun	28 Jun	2.72	•
130	**MEP & Finishing Works**	32.5	09 Jun	22 Jul	293.68	
131	**Mechanical Installations**	10.0	09 Jun	23 Jun	64.72	
132	**Water Piping**	9.0	09 Jun	22 Jun	40.96	
133	Route Layout	1.0	09 Jun	10 Jun	2.00	
134	Cut Pipes	1.0	10 Jun	13 Jun	19.92	
135	Install Pipes	4.0	13 Jun	17 Jun	10.88	
136	Joints & Connections	2.0	17 Jun	21 Jun	5.44	
137	Leak Test	1.0	21 Jun	22 Jun	2.72	
138	**Sewage Piping**	9.0	10 Jun	23 Jun	23.76	
139	Layout Risers	1.0	10 Jun	13 Jun	2.00	
140	Slope Setting	1.0	13 Jun	14 Jun	2.72	
141	Install Pipes	3.0	14 Jun	17 Jun	8.16	
142	Install Traps	2.0	17 Jun	21 Jun	5.44	
143	Watertightness Test	2.0	21 Jun	23 Jun	5.44	
144	**Electrical Installations**	23.0	09 Jun	11 Jul	40.16	
145	**Conduit Installation**	5.0	09 Jun	16 Jun	16.96	
146	Route Layout	1.0	09 Jun	10 Jun	2.00	
147	Install Conduits	1.0	10 Jun	13 Jun	6.80	
148	Fix Conduits	1.0	13 Jun	14 Jun	2.72	
149	Route Inspection	2.0	14 Jun	16 Jun	5.44	
150	Conduit Approval	0.0	16 Jun	16 Jun	0.00	
151	**Wiring**	18.0	16 Jun	11 Jul	23.20	
152	Cut Wire	1.0	16 Jun	17 Jun	2.72	
153	Pull Wire	3.0	17 Jun	22 Jun	8.16	
154	Connect Wires	12.0	22 Jun	07 Jul	10.56	
155	Initial Test	1.0	07 Jul	08 Jul	0.88	
156	Wiring Approval	1.0	08 Jul	11 Jul	0.88	
157	**Finishing & Handover**	24.5	21 Jun	22 Jul	188.80	
158	**Interior Finishing**	8.0	21 Jun	30 Jun	50.80	
159	Interior Plastering	2.0	21 Jun	23 Jun	13.60	
160	Flooring	2.0	23 Jun	27 Jun	14.80	
161	Interior Painting	2.0	27 Jun	28 Jun	13.60	
162	Install Interior Doors	1.0	28 Jun	29 Jun	6.80	
163	Quality Control	1.0	29 Jun	30 Jun	2.00	
164	**Exterior Finishing**	9.0	27 Jun	08 Jul	42.80	
165	Building Facade	2.0	27 Jun	29 Jun	13.60	•
166	Install Doors & Windows	2.0	29 Jun	01 Jul	13.60	•
167	Insulation	1.0	01 Jul	04 Jul	6.80	•
168	Exterior Painting	1.0	04 Jul	05 Jul	6.80	•
169	Final Inspection	1.0	07 Jul	08 Jul	2.00	•
170	**Project Handover**	11.0	08 Jul	22 Jul	95.20	
171	Final Cleaning	2.0	08 Jul	11 Jul	13.60	•
172	Snagging (Defect Rectification)	3.0	11 Jul	14 Jul	68.40	•
173	Provisional Handover	3.0	14 Jul	19 Jul	6.00	•
174	Final Handover	1.0	19 Jul	20 Jul	2.40	•
175	Project Closure	2.0	20 Jul	22 Jul	4.80	•
176	Project Finish	0.0	22 Jul	22 Jul	0.00	•

• = activity on the critical path. Days = working days; Cost in million Toman; all dates in 2026.